

ultra-low temperature cabinet

ULTU 100

-40...-86°C



Eco-friendly refrigerant



Electronic temperature controller with digital display



Alarm backup battery



2 check holes



2 adjustable legs and 2 rolls



Manual decompression valve



Easy access to condenser cleaning



STANDARD EQUIPMENT:

- RAL 7012 / RAL 7035 coated external body
- Interior made of AISI 304 acid-resistant steel
- 120 mm insulation
- Cascade cooling system
- Eco-friendly refrigerant
- Solid door
- Right-hand door
- Electronic temperature controller with a 7" touch screen on the door, with a built-in temperature and device operating parameters recording system
- Possibility to change the temperature setting every 0.1K
- Side handle with integrated lock
- High and low temperature visual and sound alarm
- Open door alarm
- Dirty condenser coil alarm
- Broken temperature sensor alarm
- Compressor failure alarm
- Power failure alarm
- Alarm backup battery
- Shelf guides / horizontal supports
- 1 perforated sheet metal shelf
- Adjustable shelf position
- 2 check holes
- 2 adjustable legs or 2 rolls
- Easy access to condenser cleaning
- Condenser filter
- Manual decompression valve



OPTIONAL EQUIPMENT:

- 2 castors with brake and 2 castors without brake
- Additional shelf guides / horizontal supports
- Additional (perforated) shelves
- Left-hand door
- External standalone temperature monitoring set with a SIM card
- External alarm output - potential-free contact
- CO₂ backup

+ ADDITIONAL SERVICES:



Installation qualification



Operational qualification



Performance Qualification

LAUREAT KONKURSU




TERAZ POLSKA

Bolarus

since 1962

ultra low temperature cabinet

ULTU 100

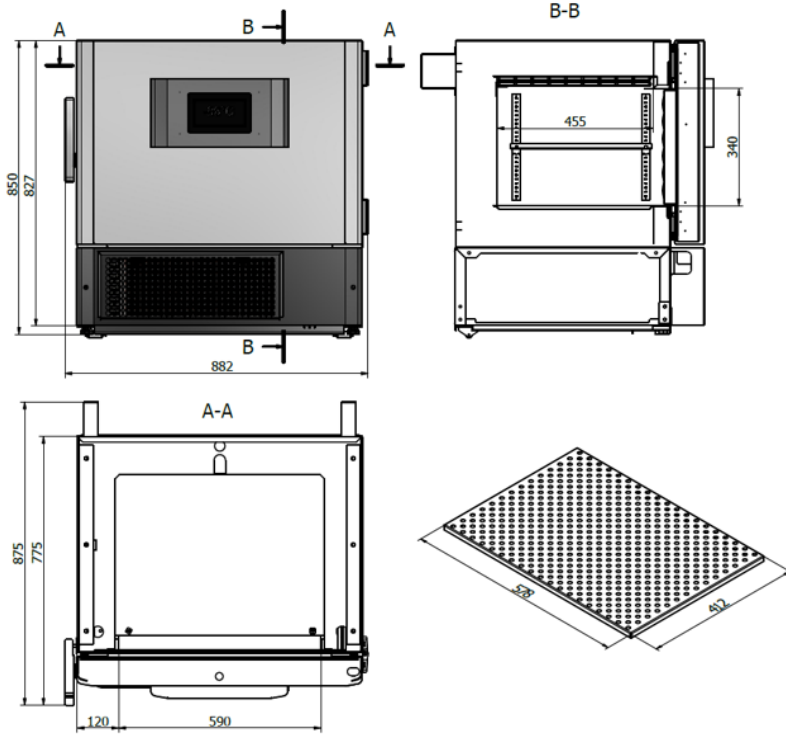

Eco-friendly refrigerant



Electronic temperature controller with digital display



Alarm backup battery



2 check holes



2 adjustable legs and 2 rolls



Manual decompression valve



Easy access to condenser cleaning

Technical data

	Width	Depth	Height
External dimensions [mm]:	882	875 (775)	850
Internal dimensions [mm]:	590	455	340
Cooling unit type:	internal		
Cooling type:	static		
Gross capacity:	90 [dm ³]		
Net capacity:	65 [dm ³]		
Weight:	130 [kg]		
Max load:	50 [kg]		
Number of shelves:	1		
Number of guides / horizontal supports:	4		
Possible number of racks:	8		
Possible number of 50mm / 2" containers	72		
Max shelf load:	25 [kg]		
Temperature range:	-40... -86 [°C]		
Ambient conditions:	+25 [°C] at 60% HR		
Refrigerant:	R290 / R1150		
Power:	230/50 [V/Hz]		
Number of external doors:	1		
Number of internal doors:	-		
Daily energy consumption:	13.8 [kWh/24]		
Noise level:	53 [dB]		
Power rating:	1100 [W]		
Rated current:	4.7 [A]		
Time required to reach the temperature -80°C:	3 - 4 hours		